

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION

P50GL
Revision 1
McCAULEY
1A103
May 24, 2006

TYPE CERTIFICATE DATA SHEET NO. P50GL

Propellers of models described herein conforming with this data sheet (which is part of propeller type certificate No. P50GL) and other approved data on file with the Federal Aviation Administration meet the minimum standards for use in certificated aircraft in accordance with pertinent aircraft data sheets and applicable portions of the Federal Aviation Regulations provided they are installed, operated, and maintained as prescribed by the approved manufacturer's manuals and other approved instructions.

Type Certificate Holder McCauley Propeller Systems
7751 East Pawnee
Wichita, KS 67207

Type Certificate Holder Record: Name changed from McCauley Accessory Division, Cessna Aircraft Company, Vandalia, OH 45377 to McCauley Propeller Systems, 7751 East Pawnee, Wichita, KS 67207 May 2006.

Type Fixed pitch metal
Material Aluminum alloy
Number of blades Two


Model See Note 2	Takeoff Max. Cont.		Diameter	Standard Pitch	Hub Drilling			Diameter Pilot Hole	Hub Dimensions		Weight (lb.) (Max.Dia.)
	HP	RPM			No. Holes	Dia. Holes	Dia. Bolt Circle		Dia.	Thickness	
1A103/TCM	110	2550	69"-66"	68"-38"	6	25/64"	4-3/8"	2-1/4"	5"	3"	23.0

Certification basis Federal Aviation Regulations Part 35 effective February 1, 1965, with Amendments 35-1 and 35-2 thereto.
Type Certificate No. P50GL issued March 2, 1977, under delegation option procedures Federal Aviation Regulations Part 21, Subpart J.
Date of application for Type Certificate March 2,, 1977.

Production basis Production Certificate No. 3

NOTE 1. Installation. Propeller Model 1A103/TCM is for use on SAE No. 1 flange propeller shaft with six 3/8" mounting bolts and must be installed in accordance with McCauley Drawing No. C-4874.

NOTE 2. Propeller Model Designation. The propeller model designation consists of a series of numbers suffixed to the basic design number to indicate propeller diameter and geometric pitch at the .75 radius.

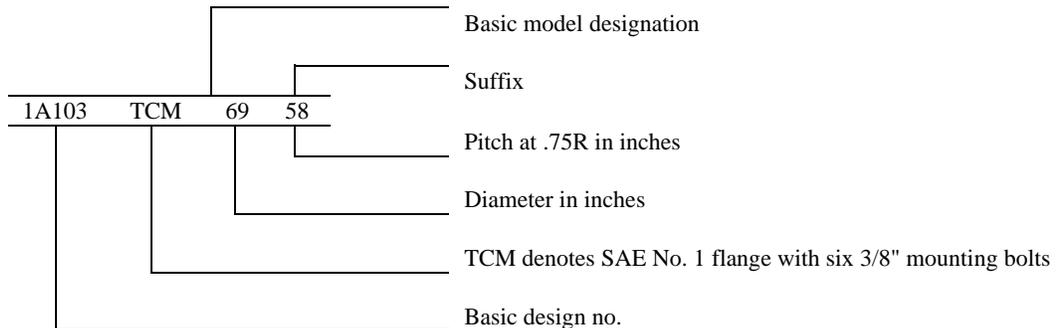

Page No.	1	2
Rev. No.	1	-

NOTES 3, 4, 5, 6, 7, and 8. Not applicable.

NOTE 9.

Table of Propeller-Engine Combinations
Approved Vibrationwise for Use on Normal Category Single-Engine Tractor Aircraft

The maximum and minimum propeller diameters that can be used from a vibration standpoint are shown below. No reduction below the minimum diameter listed is permissible since this figure includes the diameter reduction allowable for repair purposes.

Propeller Model	Engine Model	Engine Damper Configuration	Max. Dia. (Inches)	Min. Dia. (Inches)	Placards
1A103/TCM	Lycoming O-235-L2C (up to 110 hp @ 2550 rpm for all operations)	None	69	67.5	None

NOTE: Limited to aircraft having full throttle static rpm at 2280 to 2380 rpm. V_c not over 111 KIAS and V_{NE} not over 149 KIAS.

NOTE 10.

The word "eligible" as used herein does not signify approval. For approval, compliance with the applicable aircraft airworthiness requirements is necessary.

.....END.....